

DIMMING CABINET

EASYCAB

The EASYCAB digital, particularly compact dimming cabinets are designed to meet the most demanding specifications required by theatres, general-purpose rooms, cabarets, TV studios...

The extreme simplicity of the user interface makes safe the operation in all circumstances. Its advantageous price is appropriate for all budgets.

MODELS

12 x 2.3 kW connection on terminal blocks

12 x 2.3 kW connection on sockets

24 x 2.3 kW connection on terminal blocks

24 x 2.3 kW connection on sockets

- ♦ Detection, visualization and protection against wrong connections
- ♦ 32000 steps: very high precision
- ♦ Circuit protection with single pole + neutral fuse
- ♦ Temperature checking by microprocessor
- ♦ DMX 512 digital control
- ♦ Assignment by 3 coding selectors
- ♦ Local tests



Configurations

12 x 2,3 kW

24 x 2,3 kW

Dimensions & Weight

Model	Width (mm)	Height (mm)	Depth (mm)	Weight (kg)
2983	605	493	400	28
2986	605	493	400	29
2984	605	671	400	56
2987	605	849	400	62

GENERAL SPECIFICATIONS

- Assignment number selection of the first DMX circuit (1 to 512)
- Local tests by steps of 10%
- Chaser selection among nine with its running speed
- Curve: linear
- Last DMX level held in the event of DMX signal loss
- LED power indicator and fault signalization
- LED: OK, DMX signal and temperature
- Free standing floor intallation or on a mural fixing kit (option)
- Models

2983	12 x 2.3 kW	connection on 2+T terminal block
2986	12 x 2.3 kW	connection on 2+ T 10/16A NF double sockets
2986CE	12 x 2.3 kW	connection on CEE 2+T 16A sockets
2984	24 x 2.3 kW	connection on 2+T terminal block
2987	24 x 2.3 kW	connection on 2+ T 10/16A NF double sockets
987CE	24 x 2.3 kW	connection on CEE 2+T 16A sockets


TECHNICAL SPECIFICATIONS

Power supply	: TRI +N+T 230/400V, 50/60Hz on terminal block
Protection	: UNI+N 10A HPC fuse on each output
SCR control	: Digital for all control cases
Circuit outputs	: Terminal block or sockets
Control	: DMX 512 on internal terminal block
Environment	: Temperature 0° to + 40°C, Humidity 0 to 90%
Cooling	: Noiseless fans
Operation	: Leading edge dimming
Source compatibility	: Incandescence, Halogen 230, Ferro magnetic transformer halogen, Fluo (contact us)
CEM compatibility	: According to EN 55014 60669 / 60439 standards

OPTIONS

Option 07	: Circuit protection with UNI + N 10A MCB
Option 42	: 4x40A 30mA RCCD by group of 12 circuits
2892	: Mural fixing kit
Shuko / Swiss	: Shuko or Swiss sockets

DESCRIPTION

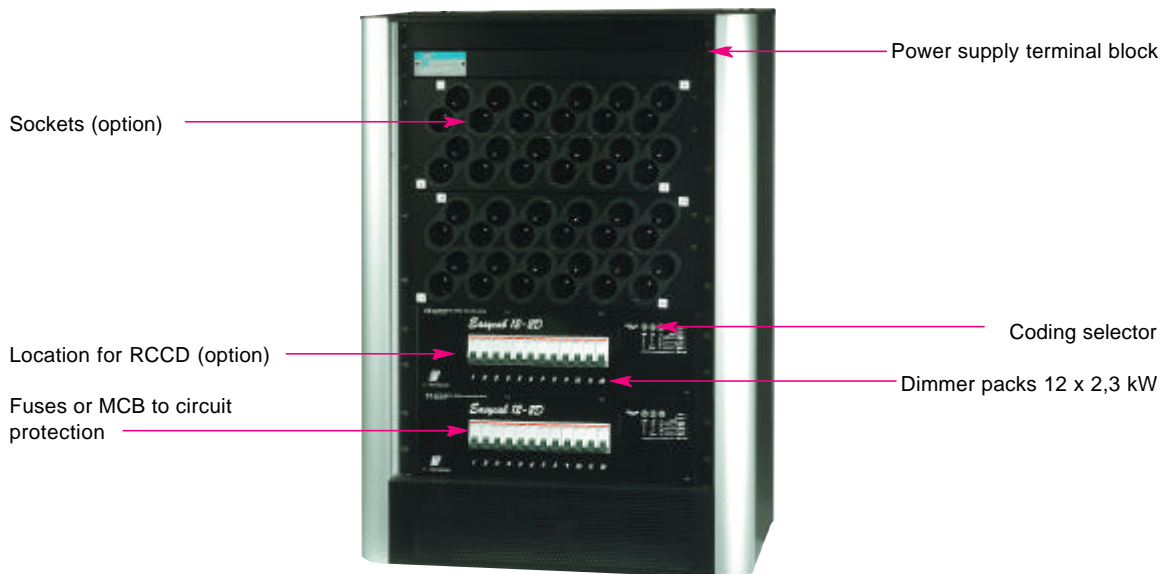

CE marked according to the EEC/89/336 and EEC/73/23 - Environment 1.
 This device is designed for working on private or public NF EN 50160 network.
 Photo: Euro Light System creation

an_easycab_cabinet_ft0 15/11/06 RVE Technologie reserves the right to make any variation in design or construction to the equipment described without prior notification.



RVE

Phone: +33 (0)1 48 54 31 63, Fax: +33 (0)145 28 67 53, E-mail: commerce@rvetec.com, Website: www.rvetec.com